


GB10190 IEC384-16

PET ;
UL94 V-0


CP

CBB21

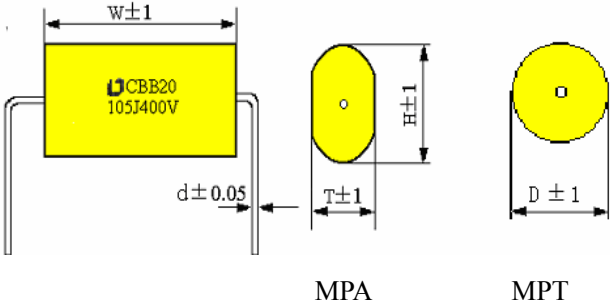

mm	15	20	25	30/35	45/50/57
mm	0.6	0.8	0.8	0.8	1.0/1.2
PVC	22#	22#	20#	18#	12#

	-40--+85℃/110℃					
	100V 250V 400V 630V					
	0.010μF-33μF					
	±5% ±10%					
	1.6UR 5S					
	≤0.33μF			≥25000MΩ		
	0.33μF			≥7500S MΩ.μF		
	≤0.0010 1KHz 20℃					
	40±2℃ 93%RH 21 △C/C≤5% 1KHz ≤0.002 IR ≥ 50%					
	+85℃/110℃ 1000h 1.25× △C/C≤5% IR ≥ 50%					
dv/dt v/μS	Length	15	20	25	30/35	45-57
	dv/dt	400	200	150	100	50

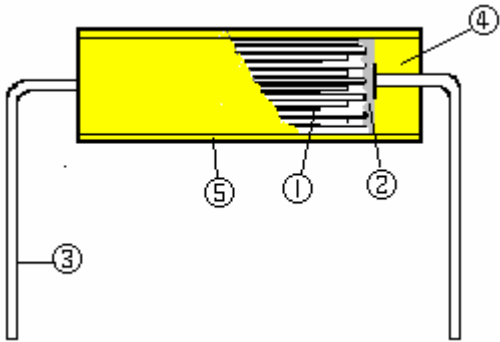

CP

PET

■

DC	100VDC	250VDC	400VDC	630VDC
AC	63VAC	160VAC	200VAC	250VAC

■

